TheShutterShop

GENOA™ COLLECTION — S:CRAFT

Albaro™ Range Technical Specifications

2025 Version 2.0 — components, general specification, colours, stacking heights and warranty for the made-to-measure Albaro™ faux wood venetian blind range.



ULTIMATE SMARTLIFT™ | SMART PRIVACY | CENTRE SLOT | 50MM & 63MM SLATS

SPECIFICATIONS BY	SUPPLIED BY	VERSION	SPEC REF
S:CRAFT	The Shutter Shop Ltd	2025 Version 2.0	SPEC01-2018

ALBARO SPECIFICATIONS

Albaro Range Contents

To go to required section click coloured headings below

SECTION 1 — 02

Features and benefits

SECTION 2 — 03

Components and accessories

Headrails	05	Centre Slot	
Valances		Toggle	
Slat sizes		Cord consolidator	
Bottom rail		Installation bracket	
Privacy slat	06	Valance Installation parts	

SECTION 3 — 09

General specification

Mounting type		Cord length	
Size limit		Cutout rules	16
Control Option		Albaro colours	17
Valance and return size	11	Cloth tape selection	
SmartLift Wand Lengths	12	Stacking Heights	20
Common Valance	14	Troubleshooting	24
Ladder cord schedule		Disclaimers	

SECTION 4 — 25

Warranty



The Albaro™ range of venetian blinds are tailored towards a modern and also a more traditional interior.

A faux wood range that has all the style of real wood venetians, but is made from a practical and man-made polyvinyl material that stands up to the daily wear and tear of a family home. Choose from two different slat sizes, 5 solid smooth, 6 solid embossed, and 6 printed embossed wood colours.

- Hard-wearing, durable and easy to clean
- A choice of six cloth tape colours
- Available with three stylish valance options and a courbe toggle
- Ideal for large window expanses, maximum single blind width of over 2.4

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

1.

Features and Benefits

The Made-to-Measure Genoa™ Collection from S:CRAFT featuring Albaro™

The Genoa collection is the most comprehensive blind range in the UK offering a multitude of configurations and finishing options, featuring Serino™; a real wood range crafted from paulownia and Albaro™, a faux wood polyvinyl range of venetian blinds. S:CRAFT's Albaro range of blinds are of exceptional build quality and give a superior solution for any type of window.

Features Include:

COMPLETE PRIVACY

- Tightest slat closure on the market for increased black-out
- No large punched holes in slats reducing light bleed and increasing privacy*

INDUSTRY LEADING FUNCTIONALITY

- Advanced easy-lock mechanism
- Optional SmartRelease for smooth and effortless opening in one pull
- A single headrail can be used with a number of blinds allowing for all cords to be consolidated at either end of the blind
- Ability to cut-out the blind around door or window furniture
- Hold down brackets for face fixing to doors
- Trapezoid bottom rail eliminates rocking and damage to window sill
- Slats are made of a lightweight material with a beautiful grain
- Easy to use, clean and maintain.

EXCEPTIONAL OPTIONS

- Optional SmartLift™ (cordless) or corded lift with superior lift and drop
- 50mm and 63mm slat sizes
- 17 colour finishes
- 6 plain fabric cloth tape colours
- TPE headrail with a choice of 16 coordinated headrails colours
- High quality valance options

CHILD SAFE

- Child safety cord consolidator fitted as standard reducing the risk of potential strangulation
- +/- 6mm tolerance on drop
- Window spans of up to 2.4 meters wide on a single blind
- Tapes, strings and cords consistently placed same distance from end of slat
- Hardwearing, durable and easy to clean TPE (Thermoplastic elastomers)


* Only available on New Privacy Slat not Centre Slat

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

2.

Components and Accessories

ULTIMATE SMARTLIFT™ (CORDLESS) LIFT
PVC HEADRAIL IS DEFAULT (VALANCES ARE OPTIONAL EXTRA)

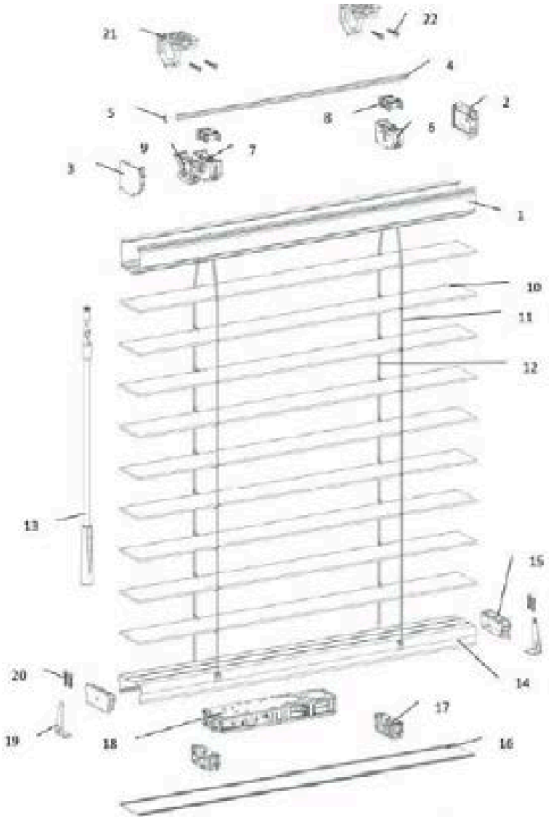


NO	DESCRIPTION	NO	DESCRIPTION		
1.	PVC Headrail	9	Wand tilter	17	Cord Guide
2	Headrail end cap (right)	10	Slat	18	Spring box
3	Headrail end cap (left)	11	Ladder	19	Hold down bracket (optional)
4	Tilt rod	12	Inner cord	20	Screw for hold down bracket
5	Ring stopper	13	Wand set	21	Installation bracket
6	Head rail drum support	14	Bottom rail	22	Screw for installation bracket
7	Drum	15	Bottom rail end cap		
8	Drum cap	16	Bottom rail cover		

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

SECTION 2 · COMPONENTS AND ACCESSORIES


SMART PRIVACY WITH LADDER CORD

Optional Valance

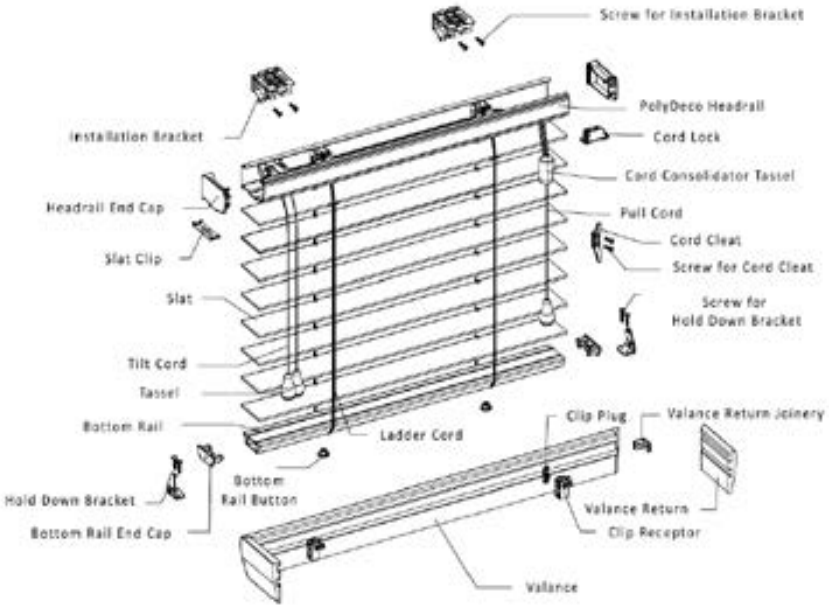

CENTRE SLOT WITH CLOTH TAPE

Optional Valance

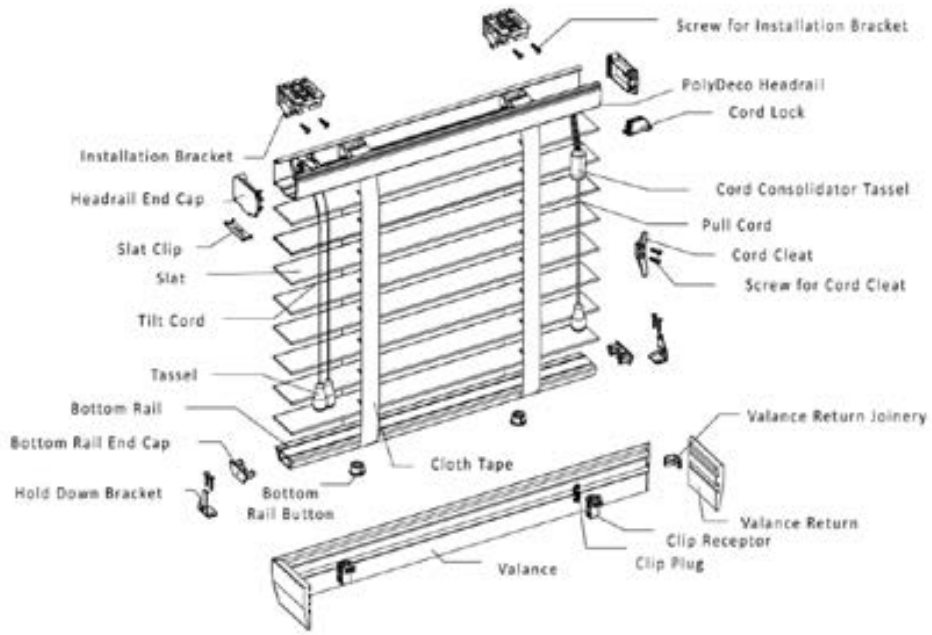


©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

SECTION 2 · COMPONENTS AND ACCESSORIES


STANDARD HEADRAIL

PVC headrail in 16 colours, colour coordinated with blind colours




For 50.8mm & 63.5mm slat

END CAP FOR HEADRAIL (ULTIMATE SMARTLIFT)




Left




Right

OPTIONAL VALANCE WITH SURCHARGE


Ramp 63.5mm



Designer Crown 82.5mm




Modern Curved 63.5mm




SLAT SIZES

50.8mm & 63.5mm

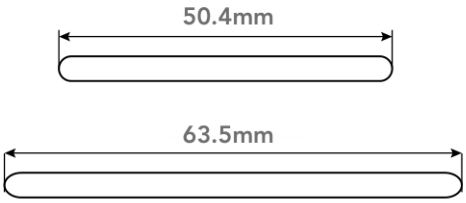

BOTTOM RAIL (CORDED)

Incorporate a flush bottom rail cap to minimize gap at the bottom of the blind for recess mount and dent free for window casement.



BOTTOM RAIL BUTTON

Bottom Rail Button for ladder cord blinds



Bottom Rail Button for cloth tape blinds



©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

SECTION 2 · COMPONENTS AND ACCESSORIES

BOTTOM RAIL (ULTIMATE SMARTLIFT)



50mm 63mm

Please note: a known characteristic of Ultimate SmartLift is that when the blind is tilted to a closed slat position, the bottom bar will pivot 90 degrees and raise higher behind the slats to create the tightest slat closure. Please be aware, that when the blind is tilted to open the slat position the bottom bar may need readjusting manually.

END CAP FOR BOTTOM RAIL (ULTIMATE SMARTLIFT)



50mm 63mm


BOTTOM RAIL COVER (ULTIMATE SMARTLIFT)



50mm 63mm

INSTALLATION BRACKET

Corded & SmartLift

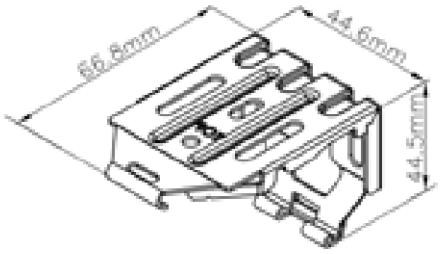


BLIND WIDTH	INSTALLATION BRACKET QTY
X ≤ 939MM	2
939mm < X ≤ 1193mm	3
1193mm < X ≤ 1905mm	4
1905mm < X ≤ 2438mm	5

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.


SECTION 2 · COMPONENTS AND ACCESSORIES

PRIVACY



For ladder cord (default)

CENTRE SLOT



For cloth tape only

NB. For privacy blinds, the alignment of the slats, when fitting next to adjacent blinds cannot be guaranteed in the specs under general specification/ mounting type and size definition.

Please note: a known characteristic of privacy blinds is that the slats can have an irregular bunching at the edges, this is caused when the blind is raised/lowered regularly and is visible at the edges. To correct this, simply lower the blind to its full drop, starting from the outside edge, working from the top-down, run your hands firmly down the edges of each slat end to align them.

Dress the blinds upon installation to create a neat and uniform finish, if the blinds are raised and lowered frequently after that, the slats may not maintain their dressed position.

TOGGLES

Made of high quality extruded plastic



Courbe
(37mm)

PVC Toggle

CORD CONSOLIDATOR

Safety breakaway toggle in cylinder shape with a round head.



Safety Consolidator
(38mm)

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

SECTION 2 · COMPONENTS AND ACCESSORIES

HOLD DOWN BRACKET

Supplied with each blind.



For 50.4mm slat



For 63mm slat

CORD CLEAT

Two supplied with each blind.



VALANCE INSTALLATION PARTS



Valance Clip (plug)




Valance Clip (receptor)



Valance Return Joiner


VALANCE CONNECTOR





Supplied for connecting spliced valances.

OPTIONAL PART - SPACER BLOCK



NB. First spacer block will extend the bracket out by 10mm, two spacer blocks will extend by 18mm.

SMARTLIFT (CORDLESS) WAND



©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

3.

General Specification

MOUNTING TYPE AND SIZE DEFINITION

	RECESS SIZE / INSIDE MOUNT (IM)	BLIND SIZE / OUTSIDE MOUNT (OM)
Mounting Position	Blind fits within window opening	Blind overlaps window opening
Order Size	**Window opening size:** Provide the smallest measurement from the top, middle and bottom measurement. Top measurement is critical because the headrail must fit. Measure the height left, center and right and provide the biggest height.	**Net size:** Measure the desired width and height. To minimize light leakage, the blind should overlap the window opening at least 50mm on each side and at the bottom.
Finished Blind Size	Width = Order width - 10mm Drop = Order Height - 2mm	Width = Order Width Drop = Order Height

*Finished blind width is equal to slat length; finished blind drop is measured from top edge of headrail to bottom edge of bottom rail with slats in closed position when blind is fully released.

Tolerance on width: ±2mm;
Tolerance on drop: for 50mm slat 0 -+45mm, for 63mm slat 0 - +57mm

*Above standard deductions will be made by the factory

SIZE LIMIT - CORDED

		WIDTH				
			MINIMUM (WITH CORD LOCK)			
SIZE	BLIND TYPE	MINIMUM (NO CORD LOCK)	RR/LL	RL/LR	MAXIMUM	MAX SQM
Width	Single Blind	165mm *	459mm	305mm	2438mm	Single: 5.57m²
	Multiple Blind - 2 on 1 on one headrail (not available for SmartLift)	n/a	924mm	616mm	2743mm	2 on 1: 8.36m²
Drop			254mm		3048mm	

NB. The above chart does not mean that a blind can be ordered in maximum width and maximum height.

For blinds with a width 165mm ≤X<305mm, the max. height is 2438mm.

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

SECTION 3 · GENERAL SPECIFICATION

CONTROL OPTION

DEFAULT	OPTIONAL
Cord tilt left (L), pull cord right (R)	Cord tilt right (R), pull cord left (L)
	Cord tilt right (R), pull cord right (R)
	Cord tilt left (L), pull cord left (L)

Tilter will be at the outer end when both controls are at the same side. For blinds with width 165mm ≤X<305mm, there will only be tilt cord at the centre. Blinds with width between 305mm and 458mm must have split control, one on left and one on right.

SIZE LIMIT - SMARTLIFT™ (CORDLESS)

SINGLE BLIND	MIN.	MAX.	MAX SQFT
Blind Width	165mm*	2438mm	4.46SQM
Blind Drop	406mm	2438mm	


*For blinds with width of 165mm ≤X<381mm will be made with the wand placed In the centre and will have no lift function. Please note 2 on 1 is not available for SmartLift.

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

SECTION 3 · GENERAL SPECIFICATION

VALANCE AND RETURN SIZE

- No valance return for inside mount - supplied valance will be butt cut.
- Short returns supplied, if returns are required during an inside mount.
- Outside mount blind comes with valence returns, if requested.

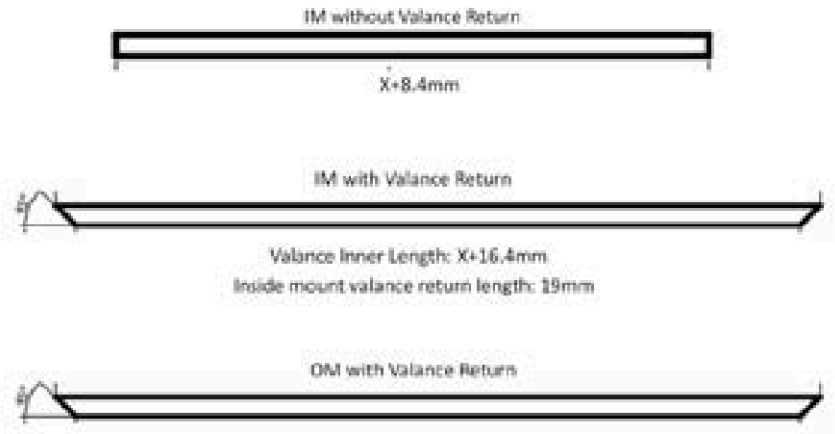

NB. Outside mount valance return length: 87mm for both 50mm and 63mm slats.

Note: If ordering with spacer block, please adjust valance return length (inner length) according to actual needs. The thickness is 10mm for 1 set spacer block and 18mm for 2 sets.

LADDER CORD SCHEDULE

BLIND WIDTH	LADDER CORD SCHEDULE			
	50MM / 63MM SLAT			
	SMART PRIVACY		CENTRE SLOT	
	LADDER	CORD	LADDER	CORD
165mm ≤ W ≤ 305mm	2	4	2	2
305mm ≤ W ≤ 685mm	2	4	2	2
685mm < W ≤ 1066mm	3	5	3	2
1066mm < W ≤ 1447mm	4	4	4	4
1447mm < W ≤ 1828mm	5	5	5	3
1828mm < W ≤ 1930mm	6	6	6	4
1930mm < W ≤ 2209mm	7	6	7	5
2209mm < W ≤ 2438mm	8	6	8	6

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

SECTION 3 · GENERAL SPECIFICATION

CORD LENGTH

INSTALLATION HEIGHT (FROM FLOOR TO THE TOP EDGE OF THE BLINDS)	BLIND HEIGHT (Y)	CORD LENGTH (Y2)
The cord length for orders without specifying installation height	254mm ≤ Y ≤ 762mm	508mm
	762mm <Y ≤ 1498mm	2/3Y
	1498mm <Y ≤ 2501mm	1000mm
	2501mm <Y ≤ 3048mm	Y-1500mm
The cord length for orders with installation height specified	Installation Height ≤ 2008mm	508mm
	2008mm<Installation Height	Installation Height-1500mm

* Custom Cord length is available. The Min Custom Cord length is 508mm. (Notes: The cord length will be defaulted at 508mm when the Custom Cord length is less than 508mm.)

*If specifying the cord length, please note the regulation required "In the fully lowered position, the distance from the floor to the bottom of the pull cords shall be at least 1.5m".

Blind height (Y): Blind height is measured from top edge of headrail to bottom edge of bottom rail with slats in fully closed position.

Tilt cord &Pull cord length (Y2): Size measured from top of headrail to bottom of tassel when the blind is in fully closed position.

SMARTLIFT™ (CORDLESS) WAND LENGTHS

DROP FROM	DROP TO	LENGTH
0mm	914mm	298mm
915mm	1219mm	451mm
1219mm	1828mm	756mm
1828mm	2438mm	972mm

Please note: Wand control can be left or right aligned

Tolerance ±25mm


Wand drop definition: when the slats are in level closing position, wand drop is measured from the top of the headrail to the bottom wand grip

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

SECTION 3 · GENERAL SPECIFICATION

MULTIPLE BLINDS ON ONE HEADRAIL & COMMON VALANCE


2 on 1 headrail

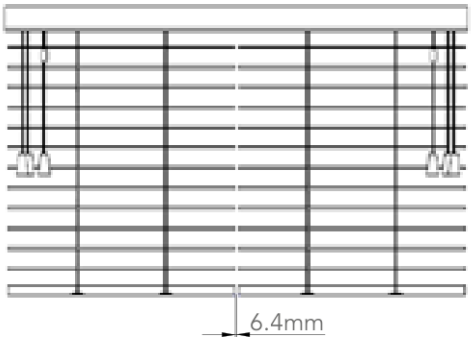

- Alignment of slats is not guaranteed for multiple blinds on one headrail.

Please note: multiple blinds on a single headrail is not available for SmartLift (cordless lift option).

Common Valance

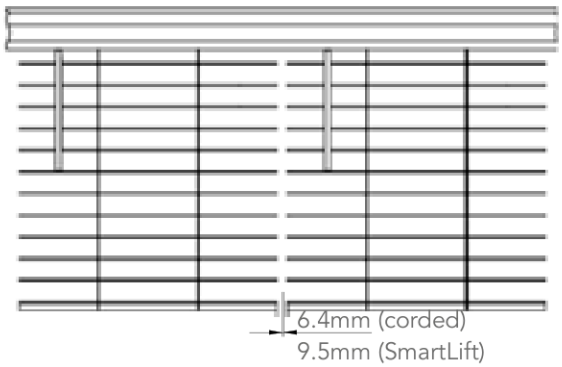

- Common valance is used for side by side blinds sharing one valance.
- Alignment of slats is not guaranteed for the side by side blinds.
- Valance will be spliced if length exceeds 2438mm. Valance connector will be supplied.
- Minimum gap size between two blinds is 6.4mm for corded and 9.5mm for SmartLift (cordless)


©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

SECTION 3 · GENERAL SPECIFICATION

STANDARD COMMON VALANCE SIZE

CORDED ALBARO: For IM without valance return, the standard common valance size = window opening size-1.6mm or the standard common valance size = left blind width +right blind width +middle blind width +gap width*gap qty+8.4mm

ULTIMATE SMARTLIFT ALBARO: For IM without valance return, the standard common valance size = window opening size-3.2mm or the standard common valance size = left blind width +right blind width +middle blind width +gap width*gap qty+6.8mm

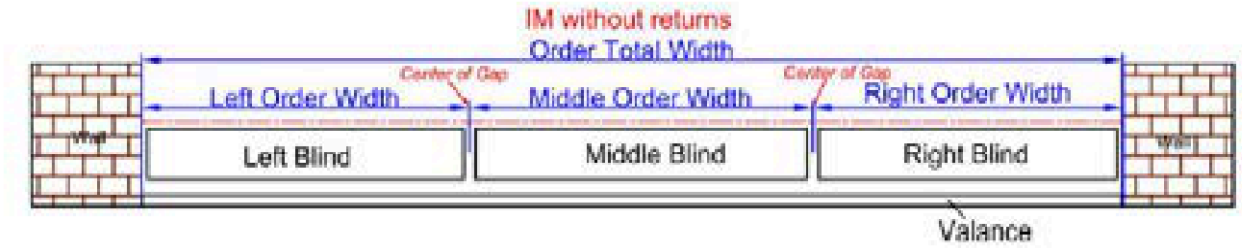

For IM with valance return, the standard common valance size = window opening size+6.4mm or the standard common valance size = left blind width +right blind width +middle blind width +gap width*gap qty+16.4mm



©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

SECTION 3 · GENERAL SPECIFICATION

STANDARD COMMON VALANCE SIZE (CONTINUED)

For OM without valance return, the standard common valance size = left blind width +right blind width +middle blind width +gap width*gap qty+25.4mm.



For OM with valance return, the standard common valance size = left blind width +right blind width +middle blind width +gap width*gap qty+25.4mm.



DEDUCTIONS FOR BLINDS WITH A COMMON VALANCE

Outside Mount: No deduction taken

Inside Mount: the left/Right blind width= left/Right order width-5mm- half of gap width

The middle blind width= middle order width-half of the left gap width- half of the right gap width

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

SECTION 3 · GENERAL SPECIFICATION

CUTOUT RULES (SURCHARGE)



A cutout is a blind with an area removed from it to avoid an existing obstruction. Please provide detailed measurements of the area to be removed, which should include:

*Cutout width
*Cutout height
*Left width
*Right width

Please note that the cut out will be made when slats are in a closed position, and based on the cutout size provided.

The cutout heights are measured up from the bottom of bottom rail no deductions no matter the measuring type is Window Size or Net Blinds Size.


For Window Size, the cutout widths are measured from the inner edge of window and the standard deduction will be made by the factory unless otherwise specified.

For Net Blinds Size, the cut out widths are measured from the edge of blind with no deductions.


A template/ diagram with the cutout similar to the one below is preferred with the order.

Mark your measurements on a template of the cutout to ensure a perfect fit to your window.

CUTOUT RULES (SURCHARGE) - CORDED

CUTOUT LOCATION	BLIND WIDTH (X)	MIN CUTOUT SIZE ON WIDTH (E)	MAX. CUTOUT SIZE ON WIDTH (E)	EXAMPLE IMAGE
Cutout on the bottom rail and the bottom section of the slats: Bottom Left Corner/ Right Corner /Both Corners & Cutout on the middle drop section of the slats: Left Side/Right Side/Both Side	165mm ≤ Y <305mm	3mm	14mm	
	305mm ≤ Y ≤ 457mm		52mm	
	X>457mm		114mm	

CUTOUT RULES (SURCHARGE) - ULTIMATE SMARTLIFT

CUTOUT LOCATION	BLIND WIDTH (X)	MIN CUTOUT SIZE ON WIDTH (E)	MAX. CUTOUT SIZE ON WIDTH (E)	EXAMPLE IMAGE
Cutout on the bottom rail and the bottom section of the slats: Bottom Left Corner/ Right Corner /Both Corners & Cutout on the middle drop section of the slats: Left Side/Right Side/Both Side	381mm ≤ X ≤ 482mm	3mm	52mm	
	482mm < X ≤ 660mm		76mm	
	X>660mm		114mm	

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

SECTION 3 · GENERAL SPECIFICATION

ALBARO VENETIAN COLOUR COORDINATION CHART - ULTIMATE SMARTLIFT

18 finishes available with colour coordinated brackets

NO.	COLOR CODE	COLOR NAME	COLOR TYPE	FINISH	POLYDECO HEADRAIL	BRACKET	BOTTOM RAIL	HEADRAIL /BOTTOM RAIL END CAP	BOTTOM RAIL BUTTON	LADDER/ CORD	"SAFETY TASSEL/ PLASTIC TASSEL"
1	6016	Pure White	Solid	Smooth	2080 Pure White	3058 White	2080 Pure White	2037 Snow White	2037 Snow White	T001 White	2037 Snow White
2	6016	Pure White *	Solid	Embossed	2080 Pure White	3058 White	2080 Pure White	2037 Snow White	2037 Snow White	T001 White	2037 Snow White
3	6017	Silk White	Solid	Smooth	2003 Silk White	3058 White	2003 Silk White	2037 Snow White	2037 Snow White	T001 White	2037 Snow White
4	6017	Silk White *	Solid	Embossed	2003 Silk White	3058 White	2003 Silk White	2037 Snow White	2037 Snow White	T001 White	2037 Snow White
5	6018	Bright White	Solid	Smooth	2003 Silk White	3058 White	2079 Bright White	2037 Snow White	2037 Snow White	T001 White	2037 Snow White
6	6018	Bright White *	Solid	Embossed	2003 Silk White	3058 White	2079 Bright White	2037 Snow White	2037 Snow White	T001 White	2037 Snow White
7	6019	Pearl	Solid	Smooth	2095 Pearl	H002 Vanilla	2095 Pearl	2012 Cameo	2012 Cameo	5020 Alabaster	2012 Cameo
8	6019	Pearl *	Solid	Embossed	2095 Pearl	H002 Vanilla	2095 Pearl	2012 Cameo	2012 Cameo	5020 Alabaster	2012 Cameo
9	6051	Designer White	Solid	Smooth	20103 Designer White	3058 White	20103 Designer White	20103 Designer White	2037 Snow White	T001 White	2037 Snow White
10	6051	Designer White *	Solid	Embossed	20103 Designer White	3058 White	20103 Designer White	20103 Designer White	2037 Snow White	T001 White	2037 Snow White
11	6101	Storm Gray *	Solid	Embossed	2149 Storm Gray	3149 Storm Gray	2149 Storm Gray	2139 Silver Gray	2150 Sea Mist	5107 Silver	2139 Silver Gray
12	6921	Chestnut *	Printed	Embossed	2537 Oak Mantel	3523 Sugar Maple	6921 Chestnut	2522 Teak	2522 Teak	5526 Cottage Pine	2522 Teak
13	6933	Limed White *	Printed	Embossed	2059 Limed White	3059 Limed White	6933 Limed White	2059 Limed White	2012 Cameo	5020 Alabaster	2012 Cameo
14	6936	Natural Oak *	Printed	Embossed	2592 Natural Oak	3523 Sugar Maple	6936 Natural Oak	2572 Natural Oak	2413 Walnut	5526 Cottage Pine	2522 Teak
15	6938	Gray *	Printed	Embossed	2138 Gray	3132 Light Gray	6938 Gray	2138 Gray	P101 Gray	T168 Gray	P101 Gray
16	6957	Mist *	Printed	Embossed	2003 Silk White	3058 White	6957 Mist	2037 Snow White	2037 Snow White	T001 White	2037 Snow White
17	6959	Granite *	Printed	Embossed	2141 Granite	3105 Gray	6959 Granite	2141 Granite	P101 Gray	T168 Gray	P101 Gray

- *This colour carries a 25% surcharge

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

SECTION 3 · GENERAL SPECIFICATION

ALBARO VENETIAN COLOURS - CORDED

18 finishes available with colour coordinated brackets and tapes.

NO.	COLOR CODE	COLOR NAME	COLOR TYPE	FINISH	POLYDECO HEAD RAIL	BOTTOM RAIL/ BOTTOM COVER	INSTALLATION BRACKET	LADDER/CORD	END CAP	HEADRAIL DRUM SUPPORT	BOTTOM RAIL DRUM SUPPORT
1	6016	Pure White	Solid	Smooth	2080 Pure White	2080 Pure White	3058 White	T001 White	2037 Snow White	2071 White	2071 White
2	6016	Pure White *	Solid	Embossed	2080 Pure White	2080 Pure White	3058 White	T001 White	2037 Snow White	2071 White	2072 White
3	6017	Silk White	Solid	Smooth	2003 Silk White	2003 Silk White	3058 White	T001 White	2037 Snow White	2012 Cameo	2012 Cameo
4	6017	Silk White *	Solid	Embossed	2003 Silk White	2003 Silk White	3058 White	T001 White	2037 Snow White	2012 Cameo	2012 Cameo
5	6018	Bright White	Solid	Smooth	2003 Silk White	2079 Bright White	3058 White	T001 White	2037 Snow White	2012 Cameo	2012 Cameo
6	6018	Bright White *	Solid	Embossed	2003 Silk White	2079 Bright White	3058 White	T001 White	2037 Snow White	2012 Cameo	2012 Cameo
7	6019	Pearl	Solid	Smooth	2095 Pearl	2095 Pearl	H002 Vanilla	5020 Alabaster	2012 Cameo	2012 Cameo	2012 Cameo
8	6019	Pearl *	Solid	Embossed	2095 Pearl	2095 Pearl	H002 Vanilla	5020 Alabaster	2012 Cameo	2012 Cameo	2012 Cameo
9	6051	Designer White	Solid	Smooth	20103 Designer White	20103 Designer White	3058 White	T001 White	20103 Designer White	2071 White	2071 White
10	6051	Designer White *	Solid	Embossed	20103 Designer White	20103 Designer White	3058 White	T001 White	20103 Designer White	2071 White	2071 White
11	6101	Storm Gray *	Solid	Embossed	2149 Storm Gray	2149 Storm Gray	3149 Storm Gray	5107 Silver	2139 Silver Gray	2139 Silver Gray	2139 Silver Gray
12	6921	Chestnut *	Printed	Embossed	2537 Oak Mantel	6921 Chestnut	3523 Sugar Maple	5526 Cottage Pine	2522 Teak	2522 Teak	2522 Teak
13	6933	Limed White *	Printed	Embossed	2059 Limed White	6933 Limed White	3059 Limed White	5020 Alabaster	2059 Limed White	2059 Limed White	2059 Limed White
14	6936	Natural Oak *	Printed	Embossed	2592 Natural Oak	6936 Natural Oak	3523 Sugar Maple	5526 Cottage Pine	2572 Natural Oak	2051 Natural Oak	2051 Natural Oak
15	6938	Gray *	Printed	Embossed	2138 Gray	6938 Gray	3132 Light Gray	T168 Gray	2138 Gray	2138 Gray	2138 Gray
16	6957	Mist *	Printed	Embossed	2003 Silk White	6957 Mist	3058 White	T001 White	2037 Snow White	2012 Cameo	2071 White
17	6959	Granite *	Printed	Embossed	2141 Granite	6959 Granite	3105 Gray	T168 Gray	2141 Granite	2141 Granite	2141 Granite

- *This colour carries a 25% surcharge

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

SECTION 3 · GENERAL SPECIFICATION


ALBARO CLOTH TAPE COLOURS

Face width 25.4mm. Available only with centre slot cloth tape blinds.



CORD COLOURS

A variety of cord colours which are colour coordinated to match the Albaro venetians.

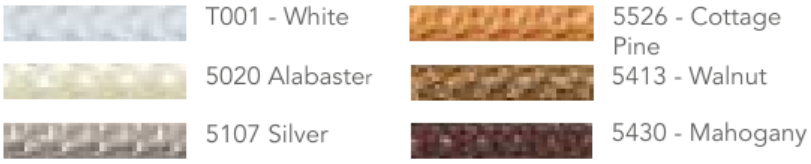

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

SECTION 4 · STACKING HEIGHTS

STACKING HEIGHTS

50MM PRIVACY CORD			63MM PRIVACY CORD			50MM CENTRE SLOT CLOTH TAPE			63MM CENTRE SLOT CLOTH TAPE		
BLINDS HEIGHT (MM)	STACKING HEIGHT (MM)	SLAT QTY	BLINDS HEIGHT (MM)	STACKING HEIGHT (MM)	SLAT QTY	BLINDS HEIGHT (MM)	STACKING HEIGHT (MM)	SLAT QTY	BLINDS HEIGHT (MM)	STACKING HEIGHT (MM)	SLAT QTY
254	77	4	254	73	3	254	78	4	254	75	3
279.4	80	5	279.4	77	4	279.4	82	5	279.4	78	4
304.8	83	6	304.8	77	4	304.8	85	6	304.8	78	4
330.2	83	6	330.2	80	5	330.2	85	6	330.2	82	5
355.6	87	7	355.6	80	5	355.6	89	7	355.6	82	5
381	87	7	381	80	5	381	89	7	381	82	5
406.4	90	8	406.4	83	6	406.4	93	8	406.4	85	6
431.8	90	8	431.8	83	6	431.8	93	8	431.8	85	6
457.2	93	9	457.2	87	7	457.2	96	9	457.2	89	7
482.6	97	10	482.6	87	7	482.6	100	10	482.6	89	7
508	97	10	508	90	8	508	100	10	508	93	8
533.4	100	11	533.4	90	8	533.4	104	11	533.4	93	8
558.8	100	11	558.8	93	9	558.8	104	11	558.8	96	9
584.2	103	12	584.2	93	9	584.2	107	12	584.2	96	9
609.6	103	12	609.6	93	9	609.6	107	12	609.6	96	9
635	106	13	635	97	10	635	111	13	635	100	10
660.4	110	14	660.4	97	10	660.4	115	14	660.4	100	10
685.8	110	14	685.8	100	11	685.8	115	14	685.8	104	11
711.2	113	15	711.2	100	11	711.2	118	15	711.2	104	11
736.6	113	15	736.6	103	12	736.6	118	15	736.6	107	12
762	116	16	762	103	12	762	122	16	762	107	12
787.4	120	17	787.4	103	12	787.4	126	17	787.4	107	12
812.8	120	17	812.8	106	13	812.8	126	17	812.8	111	13
838.2	123	18	838.2	106	13	838.2	129	18	838.2	111	13
863.6	123	18	863.6	110	14	863.6	129	18	863.6	115	14
889	126	19	889	110	14	889	133	19	889	115	14
914.4	126	19	914.4	113	15	914.4	133	19	914.4	118	15
939.8	130	20	939.8	113	15	939.8	137	20	939.8	118	15
965.2	133	21	965.2	116	16	965.2	140	21	965.2	122	16

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

STACKING HEIGHTS

50MM PRIVACY CORD			63MM PRIVACY CORD			50MM CENTRE SLOT CLOTH TAPE			63MM CENTRE SLOT CLOTH TAPE		
BLINDS HEIGHT (MM)	STACKING HEIGHT (MM)	SLAT QTY	BLINDS HEIGHT (MM)	STACKING HEIGHT (MM)	SLAT QTY	BLINDS HEIGHT (MM)	STACKING HEIGHT (MM)	SLAT QTY	BLINDS HEIGHT (MM)	STACKING HEIGHT (MM)	SLAT QTY
990.6	133	21	990.6	116	16	990.6	140	21	990.6	122	16
1016	136	22	1016	116	16	1016	144	22	1016	122	16
1041.4	136	22	1041.4	120	17	1041.4	144	22	1041.4	126	17
1066.8	139	23	1066.8	120	17	1066.8	148	23	1066.8	126	17
1092.2	139	23	1092.2	123	18	1092.2	148	23	1092.2	129	18
1117.6	143	24	1117.6	123	18	1117.6	151	24	1117.6	129	18
1143	146	25	1143	126	19	1143	155	25	1143	133	19
1168.4	146	25	1168.4	126	19	1168.4	155	25	1168.4	133	19
1193.8	149	26	1193.8	130	20	1193.8	158	26	1193.8	137	20
1219.2	149	26	1219.2	130	20	1219.2	158	26	1219.2	137	20
1244.6	153	27	1244.6	130	20	1244.6	162	27	1244.6	137	20
1270	153	27	1270	133	21	1270	162	27	1270	140	21
1295.4	156	28	1295.4	133	21	1295.4	166	28	1295.4	140	21
1320.8	159	29	1320.8	136	22	1320.8	169	29	1320.8	144	22
1346.2	159	29	1346.2	136	22	1346.2	169	29	1346.2	144	22
1371.6	163	30	1371.6	139	23	1371.6	173	30	1371.6	148	23
1397	163	30	1397	139	23	1397	173	30	1397	148	23
1422.4	166	31	1422.4	139	23	1422.4	177	31	1422.4	148	23
1447.8	169	32	1447.8	143	24	1447.8	180	32	1447.8	151	24
1473.2	169	32	1473.2	143	24	1473.2	180	32	1473.2	151	24
1498.6	172	33	1498.6	146	25	1498.6	184	33	1498.6	155	25
1524	172	33	1524	146	25	1524	184	33	1524	155	25
1549.4	176	34	1549.4	149	26	1549.4	188	34	1549.4	158	26
1574.8	176	34	1574.8	149	26	1574.8	188	34	1574.8	158	26
1600.2	179	35	1600.2	153	27	1600.2	191	35	1600.2	162	27
1625.6	182	36	1625.6	153	27	1625.6	195	36	1625.6	162	27
1651	182	36	1651	153	27	1651	195	36	1651	162	27
1676.4	186	37	1676.4	156	28	1676.4	199	37	1676.4	166	28
1701.8	186	37	1701.8	156	28	1701.8	199	37	1701.8	166	28

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

STACKING HEIGHTS

50MM PRIVACY CORD			63MM PRIVACY CORD			50MM CENTRE SLOT CLOTH TAPE			63MM CENTRE SLOT CLOTH TAPE		
BLINDS HEIGHT (MM)	STACKING HEIGHT (MM)	SLAT QTY	BLINDS HEIGHT (MM)	STACKING HEIGHT (MM)	SLAT QTY	BLINDS HEIGHT (MM)	STACKING HEIGHT (MM)	SLAT QTY	BLINDS HEIGHT (MM)	STACKING HEIGHT (MM)	SLAT QTY
1727.2	189	38	1727.2	159	29	1727.2	202	38	1727.2	169	29
1752.6	189	38	1752.6	159	29	1752.6	202	38	1752.6	169	29
1778	192	39	1778	163	30	1778	206	39	1778	173	30
1803.4	196	40	1803.4	163	30	1803.4	210	40	1803.4	173	30
1828.8	196	40	1828.8	163	30	1828.8	210	40	1828.8	173	30
1854.2	199	41	1854.2	166	31	1854.2	213	41	1854.2	177	31
1879.6	199	41	1879.6	166	31	1879.6	213	41	1879.6	177	31
1905	202	42	1905	169	32	1905	217	42	1905	180	32
1930.4	202	42	1930.4	169	32	1930.4	217	42	1930.4	180	32
1955.8	205	43	1955.8	172	33	1955.8	221	43	1955.8	184	33
1981.2	209	44	1981.2	172	33	1981.2	224	44	1981.2	184	33
2006.6	209	44	2006.6	176	34	2006.6	224	44	2006.6	188	34
2032	212	45	2032	176	34	2032	228	45	2032	188	34
2057.4	212	45	2057.4	176	34	2057.4	228	45	2057.4	188	34
2082.8	215	46	2082.8	179	35	2082.8	231	46	2082.8	191	35
2108.2	219	47	2108.2	179	35	2108.2	235	47	2108.2	191	35
2133.6	219	47	2133.6	182	36	2133.6	235	47	2133.6	195	36
2159	222	48	2159	182	36	2159	239	48	2159	195	36
2184.4	222	48	2184.4	186	37	2184.4	239	48	2184.4	199	37
2209.8	225	49	2209.8	186	37	2209.8	242	49	2209.8	199	37
2235.2	225	49	2235.2	186	37	2235.2	242	49	2235.2	199	37
2260.6	229	50	2260.6	189	38	2260.6	246	50	2260.6	202	38
2286	232	51	2286	189	38	2286	250	51	2286	202	38
2311.4	232	51	2311.4	192	39	2311.4	250	51	2311.4	206	39
2336.8	235	52	2336.8	192	39	2336.8	253	52	2336.8	206	39
2362.2	235	52	2362.2	196	40	2362.2	253	52	2362.2	210	40
2387.6	238	53	2387.6	196	40	2387.6	257	53	2387.6	210	40
2413	238	53	2413	199	41	2413	257	53	2413	213	41
2438.4	242	54	2438.4	199	41	2438.4	261	54	2438.4	213	41

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

SECTION 4 · STACKING HEIGHTS

STACKING HEIGHTS - ULTIMATE FAUXWOOD

BLINDS HEIGHT (MM)	50.4MM SLAT	63.MM SLAT
Unit: mm		
480	109.1	102.9
530	112.6	106.5
580	119.6	110.1
630	123.1	113.7
680	126.6	117.3
730	130.1	120.9
780	133.6	124.5
830	137.1	124.5
880	140.6	128.1
930	144.1	131.7
980	151.1	135.3
1030	154.6	138.9
1080	158.1	142.5
1130	161.6	146.1
1180	165.1	149.7
1230	168.6	149.7
1280	172.1	153.3
1330	175.6	156.9
1380	182.6	160.5
1430	186.1	164.1
1480	189.6	167.7
1530	193.1	171.3
1580	196.6	174.9
1630	200.1	174.9
1680	203.6	178.5
1730	207.1	182.1
1780	214.1	185.7
1830	217.6	189.3
1880	221.1	192.9
1930	224.6	196.5
1980	228.1	200.1
2030	231.6	200.1
2080	235.1	203.7
2130	242.1	207.3

BLINDS HEIGHT (MM)	50.4MM SLAT	63.MM SLAT
	LC	LC
2180	245.6	210.9
2230	249.1	214.5
2280	252.6	218.1
2330	256.1	221.7
2380	259.6	225.3
2430	263.1	225.3
2440	263.1	228.9

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

SECTION 4

Troubleshooting Guide - Ultimate SmartLift (Bottom Rail Pivot)


When the bottom rail doesn't pivot as much:


When the blind is lowered to the bottom, with too much pull force, the cordless the mechanism may be locked by accident, causing the bottom rail to stop fully rotating while you try to close the blind. To fix it, gently push the bottom rail upward with both hands to unlock the mechanism. When raising the blind, the blind doesn't lock at a certain position: The cords inside the cordless mechanism likely become tangled.
To fix it, gently lower the blind with both hands to the bottom. While the slats are in ahorizontal position, raise the blind again.

Disclaimers

While SmartPrivacy® Blinds can significantly reduce light leakage compared to traditional routed blinds, no slatted window covering can eliminate it completely. Some light gaps can be seen at the bottom of the cordless blind and this is considered normal. For rooms where room darkening is critical, please consider one of our room-darkening shutter and shade products.

- Because cordless SmartPrivacy® Blinds are route-hole free, slight shifting of the slats may occur for some users. It can easily be remedied by raising the blind to the top and then tapping the slat edges into a straightened stacked alignment.
- Please note that we are unable to match the slat count in two different Ultimate SmartLift blinds that are at the same height. This is due to the unique characteristics of the cordless mechanism. However, please rest assured that the blinds will be produced at the correct height as ordered.
- For matching purposes, side-by-side can be selected, please state this in the notes section of Portal. Side-by-side is recommended for the same room or home. But for side-by-side blinds, the characteristics of the ladders and cords to support the slats can become extendable and uneven, so the side-by-side slats cannot be matched perfectly.

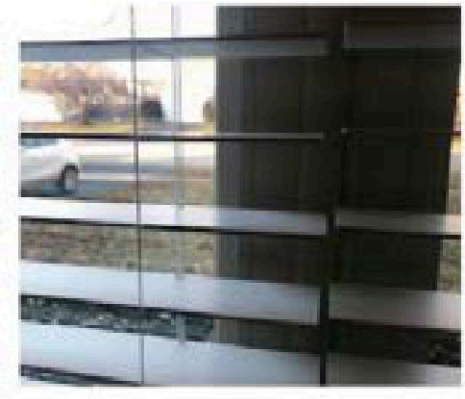

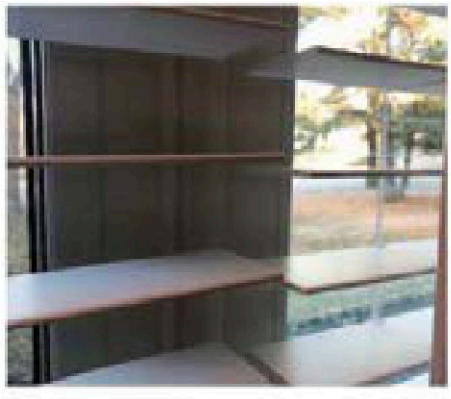

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

4.

Warranty

S:CRAFT blinds are backed by a warranty up to 2 years, starting from the shipping date of the order. The warranty covers original defects in material or workmanship, the following conditions apply:

1. The product was properly installed.
2. The product was made or assembled exclusively from Nien Made materials and components.
3. Nien Made recommendations were followed with regard to limitation and specifications.
4. If the original order waived the warranty, the EDR order (without any modifications) will have the same warranty condition as the original order.
5. For any remake orders, the warranty starts from the shipping date of the original order.
6. For EDR, the warranty starts from the shipping date of the original order.

COVERED	NOT COVERED
	• Any damage caused by unauthorised repairs, modified or improper installation, cleaning or maintenance
• All internal hardware including components and brackets are covered	• Accidents, alterations, misuse, abuse of the product
• Operational cords	• Exposure to elements (sun, wind, water/moisture, and fading or discolouration over time
• Colour fastness	• Shipping charges, any removal and reinstallation related cost
• Material and workmanship	• Any conditions caused by normal wear and tear

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

SPECIFICATIONS BY

S:CRAFT

Newdown Farm
Micheldever
Winchester
Hampshire
SO21 3BT
01962 794530
www.s-craft.co.uk

Shuttercraft Ltd.
(Trading as S:CRAFT)

SUPPLIED BY THE SHUTTER SHOP LTD

For quotations, measuring and orders of the Albaro™ range, contact The Shutter Shop on **0207 751 0937** or **sales@shuttershop.co.uk**.

©S:CRAFT Copyright in this material belongs to S:CRAFT and copying or reproduction in whole or in part is strictly prohibited. We reserve the right to alter specifications without prior notice.

TheShutterShop

MADE-TO-MEASURE SHUTTERS & BLINDS

sales@shuttershop.co.uk · 0207 751 0937

102 Waterford Road
London SW6 2HA · United Kingdom